


C-4005

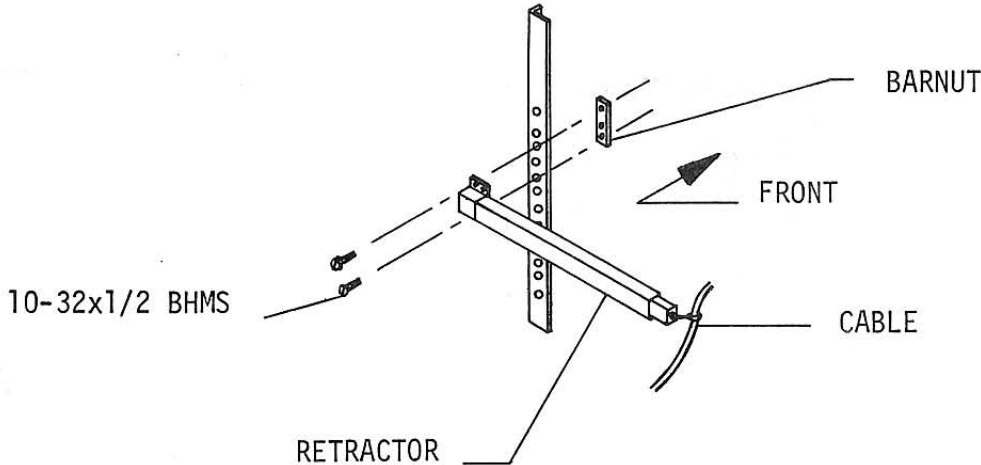

CABLE RETRACTOR

A. MOUNTING INSTRUCTION:

1. Mount the cable retractor to the rear mounting angle or channel with the retractor on the back face of the mounting angle using the BHMS and barnut provided.
2. When attaching the cable to the retractor allow 5 to 8 inches of slack between the chassis and retractor cable clamp.

B. BILL OF MATERIAL:

1. C-4005 Cable Retractor (1)
2. Hardware package #40

Hardware package #40
consists of:

<u>Item</u>	<u>Qty</u>
A-1000 #10-32x1/2 BHMS	2
A-154 Barnut	1

a division of General Devices Company, Inc.

Plant Location:

1410 South Post Road, Indianapolis, Indiana

